

10.4" LCD Open Frame Monitor

M104F-V

Specifications

LCD PANEL

Brightness	400 cd/m ²
Contrast Ratio	1000:1
Viewing Angle	H:176° / V:176°
Response Time	23 ms (Tr+Tf)
Resolution	640 x 480 (4:3)
Supported Colors	262,144

DISPLAY FEATURES

Horizontal Frequency	30K ~ 37KHz
Vertical Frequency	60 ~ 75Hz
Input Resolution	640 x 480 @ 60Hz (Analog)
DDC	DDC 2B
OSD Control	Push Button
OSD Language	English

PHYSICAL FEATURES

Connector	15 pin D-Sub / AV / S-video / Audio In/Out
Dimension	265.3 x 194.6 x 43.7 mm (WxHxD)
Weight	Net: 1.7 kg
Wall Mount Type	75mm x 75mm VESA

SPECIAL FEATURES

Audio In/Out	Yes
Fanless Design	Yes

POWER CONSUMPTION

Power Suppler	AC 100V ~ 240V (50/60 Hz)
Normal Operation	22W
Suspend / Standby	6W
Power off Mode	2W

ENVIRONMENTAL


Operating Temperature	5°C ~ 40°C
Storage Temperature	0°C ~ 50°C
Operating Humidity	85%RH
Storage Humidity	85%RH

OPTIONS

Protective surface	2mm AG/AR Tempered Glass
Speaker	N/A



Dimensions

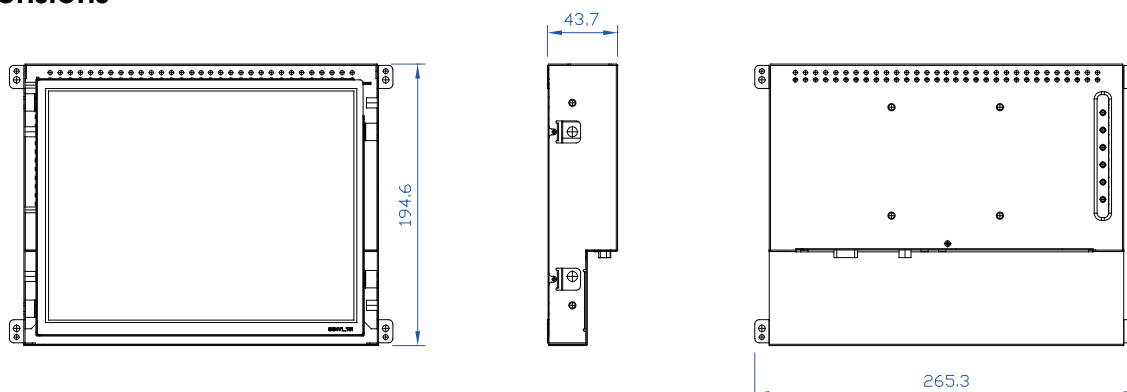

*All specifications subject to change without notice.

M104F-V/070830/VO.02A4

Chi Lin Technology Co., Ltd.
No.71, Te Lun Rd., Jen Te Hsiang, Tainan County, Taiwan
TEL: +886 6 2794113 FAX: +886 6 2797880

www.chilinIA.com