

10.4" LCD Open Frame Monitor

M104F-X

Specifications

LCD PANEL

Brightness	350 cd/m ² (Typ.)
Contrast Ratio	900:1
Viewing Angle	H:176° / V:176°
Response Time	40 ms (Tr+Tf)
Resolution	1024 x 768 (4:3)
Supported Colors	16.2M colors

DISPLAY FEATURES

Horizontal Frequency	30K ~ 65KHz
Vertical Frequency	56 ~ 75Hz
Input Resolution	1024 x 768@60Hz (Analog) 1024 x 768@60Hz (Digital)
DDC	DDC 2B
OSD Control	Push Button
OSD Language	English, French, Spanish, Italian, Deutsch, Traditional Chinese, Japanese, Simplified Chinese
Power Management	VESA DPMS

PHYSICAL FEATURES

Connector	15 pin D-Sub / DVI
Dimension	265.3 x 194.6 x 43.7 mm (WxHxD)
Weight	Net: 1.7 kg
Wall Mount Type	75mm x 75mm VESA

SPECIAL FEATURES

Fanless Design	Yes
----------------	-----

POWER CONSUMPTION



Power Supplier	AC 100V ~ 240V (50 / 60Hz)
----------------	----------------------------

ENVIRONMENTAL

Operating Temperature	5°C ~ 40°C
Storage Temperature	0°C ~ 50°C
Operating Humidity	85%RH
Storage Humidity	85%RH



Dimensions

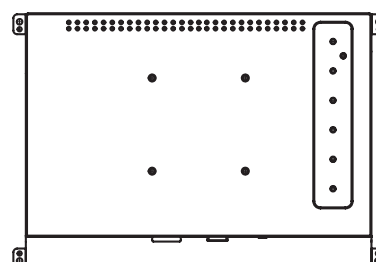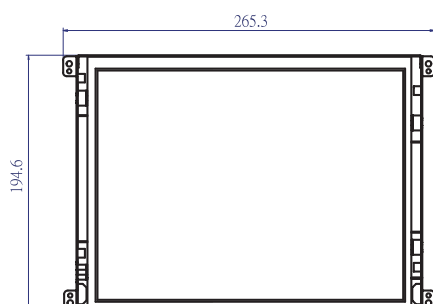

*All specifications subject to change without notice.

M104F-X/070830/VO.02A4

Chi Lin Technology Co., Ltd.
No.71, Te Lun Rd., Jen Te Hsiang, Tainan County, Taiwan
TEL: +886 6 2794113 FAX: +886 6 2797880

www.chilinIA.com