

10.4" LCD Open Frame Touch Monitor

M104FL-V

Specifications

LCD PANEL

Brightness	280 cd/m ² (Typ.)
Contrast Ratio	900:1
Viewing Angle	H:176° / V:176°
Response Time	23 ms (Tr+Tf)
Supported colors	262,144 colors
Resolution	640 x 480

DISPLAY FEATURES

Horizontal Frequency	30K ~ 37KHz
Vertical Frequency	60 ~ 75Hz
Input Resolution	640 x 480 @ 60Hz
DDC	DDC 2B
OSD Control	Push Button
OSD Language	English
Video Signal Type	Analog
Screen Scaling	4 : 3
Power Management	VESA DPMS

PHYSICAL FEATURES

Connector	15 pin D-Sub / Audio / S-video
Power Suppler	AC 100V ~ 240V
Dimension	265.3 x 194.6 x 45.4 mm (WxHxD)
Weight	Net: 1.7 kg
Wall / Arm Mount Type	75mm x 75mm VESA
Storage Temperature	0°C ~ 50°C
Operating Temperature	5°C ~ 40°C

POWER CONSUMPTION


Operation Mode	22W
Power Saving Mode	6W

TOUCH FEATURES

Technology	4-wire Resistive
Method	Finger, stylus, or any other pointer
Resolution	4096 x 4096
Response Time	≤ 30 ms
Interface	USB, Plug-and-Play compatible
Touch Calibration	Five point calibration required
Operating Systems	Windows 95 / 98 / 2000 / ME / XP, Windows NT, DOS



Dimensions

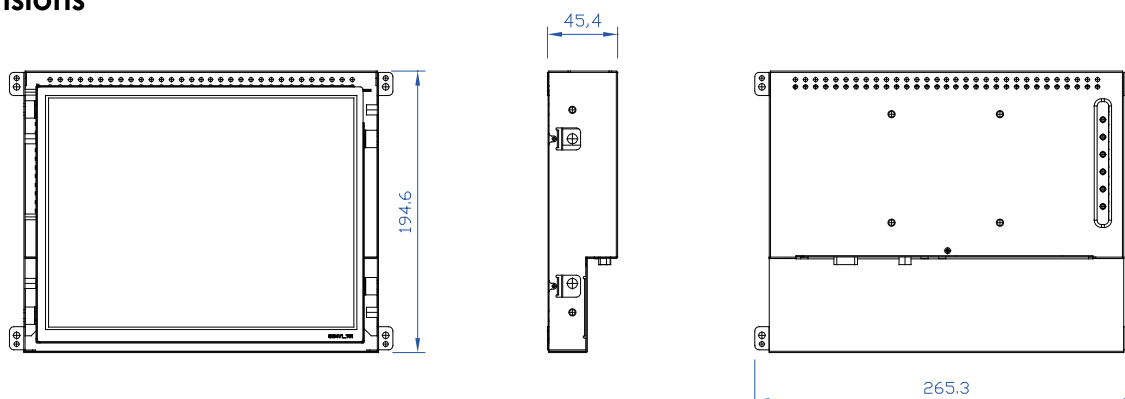

*All specifications subject to change without notice.