

19" High-Definition LCD Display

ST-HB19AOX

Specifications

LCD PANEL

Brightness	300 cd/m ²
Contrast Ratio	700:1
Viewing Angle	H:150° / V:130°
Response Time	8 ms (GTG)
Supported colors	16.2M colors
Resolution	1280 x 1024

DISPLAY FEATURES

Horizontal Frequency	30 ~ 80KHz
Vertical Frequency	60 ~ 75Hz
Input Resolution	1280 x 1024 @ 79.9Hz (Analog) 1280 x 1024 @ 79.9Hz (Digital)
DDC	DDC 2B Compliance
OSD Control	Push button
OSD Language	English, French, German, Italian, Japanese, Traditional Chinese Simplified Chinese, Spanish
Video Signal Type	RGB Analog / Digital

PHYSICAL FEATURES

Connector	15 pin D-Sub / DVI
Dimension	440 x 328.4 x 73.3 mm (WxHxD)
Diagonal	19"
Weight W/O Stand	4.45 kg
Wide operating temperature range	0°C ~ 50°C
Wide storage temperature range	-20°C ~ 60°C
Wall Mount Type	100mm x 100mm VESA 75mm x 75mm VESA

SPECIAL FEATURES

Audio in	3.5mm Phone Jack
Audio out	4Ω / 2W
Normal operation	less than 51W
Fanless design	Yes

POWER CONSUMPTION


Power Supply	AC 100V ~ 240V
--------------	----------------

COMPLIANCE



CE, FCC, CB, UL, TUV, RoHS/ WEEE

OPTIONS

Protective glass (3 mm), Touch Function

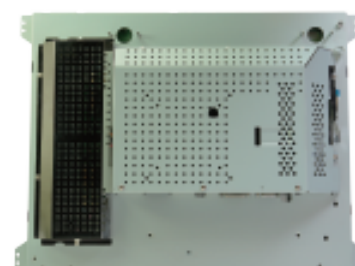

Dimensions

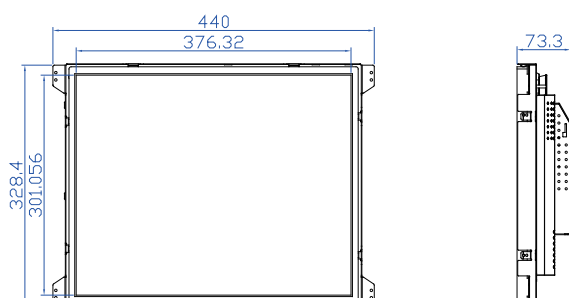

*All specifications subject to change without notice.

ST-HB19AOX/070830/VO.02A2

Chi Lin Technology Co., Ltd.
No.71, Te Lun Rd., Jen Te Hsiang, Tainan County, Taiwan
TEL: +886 6 2794113 FAX: +886 6 2797880

www.chilinIA.com