

19" High-Definition LCD Display

ST-HB19APX

Specifications

LCD PANEL

Brightness	300 cd/m ²
Contrast Ratio	700:1
Viewing Angle	H:150° / V:130°
Response Time	8 ms (GTG)
Supported colors	16.2M colors
Resolution	1280 x 1024

DISPLAY FEATURES

Horizontal Frequency	30 ~ 80KHz
Vertical Frequency	60 ~ 75Hz
Input Resolution	1280 x 1024 @ 79.9Hz (Analog) 1280 x 1024 @ 79.9Hz (Digital)
DDC	DDC 2B Compliance
OSD Control	Push button
OSD Language	English, French, German, Italian, Japanese, Traditional Chinese Simplified Chinese, Spanish
Video Signal Type	RGB Analog / Digital

PHYSICAL FEATURES

Connector	D-Sub 15 pin / DVI-D 24 pin / Video (D-Sub 9 pin)
Dimension	440 x 328.4 x 73.3 mm (WxHxD)
Diagonal	19"
Weight W/O Stand	4.45 kg
Wide operating temperature range	0°C ~ 50°C
Wide storage temperature range	-20°C ~ 60°C
Wall Mount Type	100mm x 100mm VESA 75mm x 75mm VESA

SPECIAL FEATURES

Audio in	RCA
Audio out	4Ω / 2W
Normal operation	less than 51W
Fanless design	Yes

POWER CONSUMPTION


Power Supply	AC 100V ~ 240V
--------------	----------------

COMPLIANCE

CE, FCC, CB, UL, TUV, RoHS/ WEEE

OPTIONS

Protective glass (3mm)

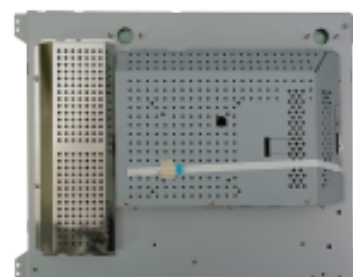

*All specifications subject to change without notice.

Dimensions

