

27" High-Definition LCD Display

ST-HB27A1X

Specifications

LCD PANEL

Brightness	500 cd/m ²
Contrast Ratio	1200:1
Viewing Angle	H:176° / V:176°
Response Time	6.5ms (GTG)
Supported colors	16.7M colors
Resolution	1366 x 768

DISPLAY FEATURES

Horizontal Frequency	30K ~ 65KHz
Vertical Frequency	56 ~ 75Hz
Input Resolution	1360 x 768 @ 60Hz (Analog) 1360 x 768 @ 60Hz (Digital)
DDC	DDC 2B
OSD Control	Push button, IR Remote Controller
OSD Language	English

PHYSICAL FEATURES

Connector	15 pin D-Sub / DVI / Component / S-video / AV
Dimension W/O Stand	671.2 x 413.2 x 82 mm (WxHxD)
Weight W/O Stand	Net: 10.5kg Gross: 14.5kg
Wall / Arm Mount Type	100mm x 100mm / 200mm x 200mm VESA

SPECIAL FEATURES

Multimedia	PIP, PAP, Zoom
Audio In/Out	N/A
Fanless design	No
Source auto detect	Yes

POWER CONSUMPTION

Power Supplier	AC 100V ~ 240V (50 / 60 Hz)
Normal Operation	less than 100W
Suspend / Standby	less than 15W
Power off Mode	less than 15W

ENVIRONMENTAL



Operating Temperature	5°C~40°C
Storage Temperature	-20°C~60°C
Operating Humidity	85%RH
Storage Humidity	85%RH

OPTIONS

Protective surface	4mm glass (AG/AR), Tempered Glass
Communication port (Transport Protocol)	D-Sub 9 Pin, RJ45 In/Out (RS-232, RS-485 In/Out)



Dimensions

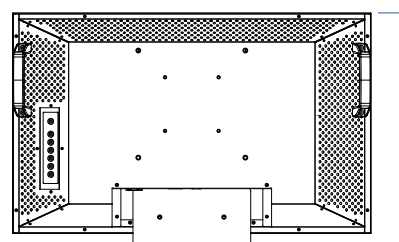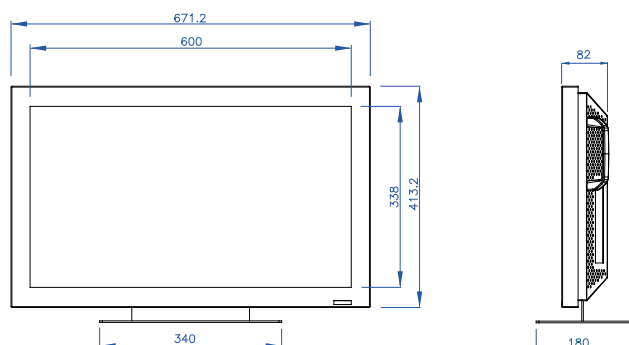

*All specifications subject to change without notice.

ST-HB27A1X/070830/VO.02A2

Chi Lin Technology Co., Ltd.
No.71, Te Lun Rd., Jen Te Hsiang, Tainan County, Taiwan
TEL: +886 6 2794113 FAX: +886 6 2797880

www.chilinIA.com