

47" High-Definition LCD Display

ST-HB47A1X

Specifications

LCD PANEL	
Brightness	500 cd/m ²
Contrast Ratio	1200:1
Viewing Angle	H:176° / V:176°
Response Time	6.5ms (GTG)
Supported colors	16.7M colors
Resolution	1920 x 1080 (16:9)

DISPLAY FEATURES	
Horizontal Frequency	30K ~ 65KHz
Vertical Frequency	56 ~ 75Hz
Input Resolution	1920 x 1080@60Hz (Analog) 1920 x 1080@60Hz (Digital)
DDC	DDC 2B
OSD Control	RS232C, Push button, IR Remote Controller
OSD Language	English

PHYSICAL FEATURES	
Connector	15 pin D-Sub / DVI / S-video / Component / AV / HD-SDI BNC x 3 (option)
Dimension W/O Stand	1139.4 x 684.4 x 126.2 mm (WxHxD)
Weight W/O Stand	Net: 38.7kg Gross: 45.7kg
Wall / Arm Mount Type	200mm x 200mm / 200mm x 600mm VESA

SPECIAL FEATURES	
Multimedia	PIP, PAP, Zoom
Audio In/Out	Option
Fanless design	YES
Source auto detect	YES




POWER CONSUMPTION	
Power Supplier	AC 100V ~ 240V (50 / 60 Hz)
Normal Operation	less then 290W
Suspend / Standby	less then 20W
Power off Mode	less then 20W

ENVIRONMENTAL	
Operating Temperature	5°C~40°C
Storage Temperature	-20°C~60°C
Operating Humidity	85%RH
Storage Humidity	85%RH

OPTIONS	
Protective surface	4mm glass (AG/AR), Tempered Glass
Audio Amplifier	In *1 or *2, Out *1
Speaker	10W x 2EA, 4Ω / 10W+10W(rms)@THD<1%
HD SDI	Yes
Communication port (Transport Protocol)	D-Sub 9 Pin, RJ45 In/Out (RS-232, RS-485 In/Out)



Dimensions

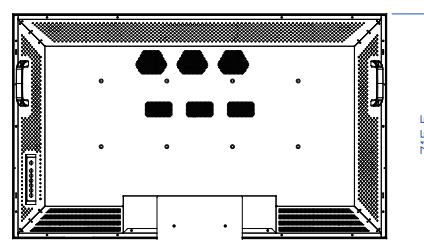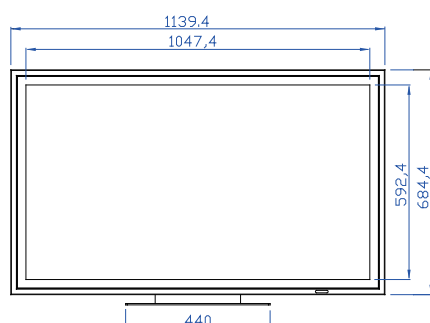

*All specifications subject to change without notice.

ST-HB47A1X/070830/VO.02A2

Chi Lin Technology Co., Ltd.
No.71, Te Lun Rd., Jen Te Hsiang, Tainan County, Taiwan
TEL: +886 6 2794113 FAX: +886 6 2797880

www.chilinIA.com