

52" High-Definition LCD Display

ST-HB52A1X

Specifications

LCD PANEL

Brightness	500 cd/m ²
Contrast Ratio	1500:1
Viewing Angle	H:176° / V:176°
Response Time	6.5 ms (GTG)
Supported colors	16.7 M colors
Resolution	1920 x 1080 (16:9)

DISPLAY FEATURES

Horizontal Frequency	30K ~ 90KHz
Vertical Frequency	56 ~ 75Hz
Input Resolution	1920 x 1080 @ 60Hz (Analog) 1920 x 1080 @ 60Hz (Digital)
DDC	DDC 2B
OSD Control	RS232C, Push button, IR Remote Controller
OSD Language	English, Japanese, Chinese

PHYSICAL FEATURES

Connector	DVI / VGA / HD-SDI x 3 (2 in, 1out) Component / S-video / AV
Dimension W/O Stand	1269 x 766 x 140 mm (WxHxD)
Weight W/O Stand	Net: 51 kg Gross: 61 kg
Wall / Arm Mount Type	200mm x 200mm / 200mm x 600mm VESA

SPECIAL FEATURES

Multimedia	PIP, PAP, Zoom
Audio In/Out	Option
Fanless design	No
Source auto detect	YES

POWER CONSUMPTION

Power Supplier	AC 100V ~ 240V(50/60 Hz)
Normal Operation	TBD
Suspend / Standby	TBD
Power off Mode	TBD

ENVIRONMENTAL




Operating Temperature	5°C~40°C
Storage Temperature	-20°C~60°C
Operating Humidity	85%RH
Storage Humidity	85%RH

OPTIONS

Protective surface	4mm glass (AG/AR), Tempered Glass
Audio Amplifier	In *1 or *2, Out *1
HD SDI	Yes
Communication port (Transport Protocol)	Built-in D-Sub 9 Pin, RJ45 In/Out (RS-232, RS-485 In/Out)



Dimensions

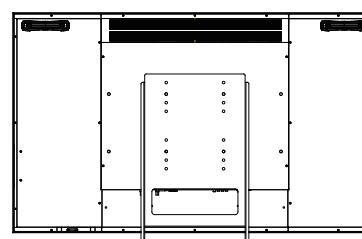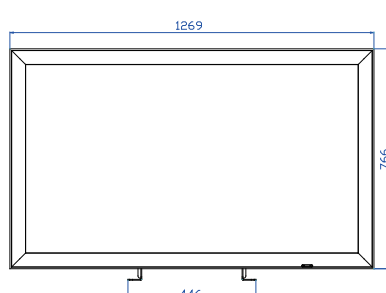

*All specifications subject to change without notice.

ST-HB52A1X/070830/VO.02A2

Chi Lin Technology Co., Ltd.
No.71, Te Lun Rd., Jen Te Hsiang, Tainan County, Taiwan
TEL: +886 6 2794113 FAX: +886 6 2797880

www.chilinIA.com